

JointFlash™

POLYETHYLENE FLASHING SYSTEM

JointFlash™ is a safe and economical solution for flashing both fiber cement and wood lap siding. The user-friendly polyethylene flashing system is perfect for both residential and commercial siding applications.



LIGHTWEIGHT



SAFE - NO SHARP EDGES



ECONOMICAL



EASY TO INSTALL



SAVES TIME AND MONEY



RESISTS CORROSION



STEP 1: Install the first pieces of lap siding without nailing the end near the butt joint.

STEP 2: After working the steps up the wall, simply tuck the piece of JointFlash™ behind the loose end of the previously installed siding. Make sure the JointFlash™ is centered on the joint and is overlapping the course below by at least one inch.

STEP 3: Install the remaining piece of siding to finish the course. Nail the last nail at the butt joint as usual. The nails at the ends of the pieces at the joint will hold the JointFlash™ securely in place.

IT'S THAT SIMPLE!

www.jointflash.com

Go to jointflash.com or contact your local
Boise Cascade representative for more information.



Boise Cascade

JointFlash™

Sistema Rápido de Po

JointFlash™ es una solución segura y económica para la colocación rápida de revestimiento de fibro-cemento. El sistema rápido de polietileno de uso amigable es perfecto las aplicaciones de revestimientos tanto comercial como residencia.



Ligero



Económico



Ahorra tiempo y dinero





Seguro – no posee bordes afilados



Fácil de Instalar



Resiste la corrosión

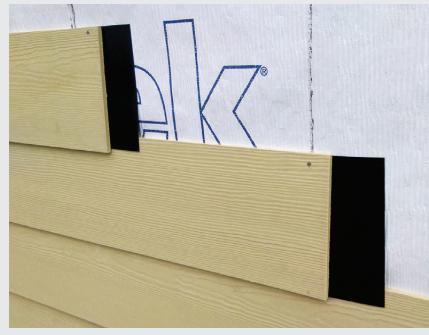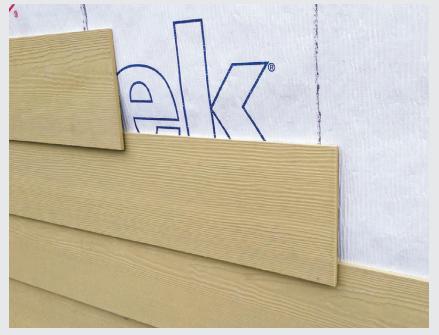

PASO 1: Instalar las primeras piezas del revestimiento sin clavar el terminal cerca de la junta de tope.

PASO 2: Luego de trabajar los pasos hacia arriba de la pared, simplemente pliegue la pieza de JointFlash™ detrás del terminal de la pieza previamente instalada. Asegúrese de que el JointFlash™ esté centrado en la junta y solapado con el de abajo por al menos una pulgada. Podría ser necesario clavar un clavo a través del solape para mantener el JointFlash™ en su lugar.

PASO 3: Instale las restantes piezas para finalizar el trabajo. Clave el último clavo en la junta de tope como es usual. Los clavos al final de las piezas de la junta mantendrán el JointFlash™ seguros y en su lugar.

¡Así de simple!

www.jointflash.com

Vaya a **jointflash.com** o comuníquese con su Representante de **Boise Cascade** para obtener más información.



Boise Cascade